# VIRTUAL TERMINAL 7" SLIM

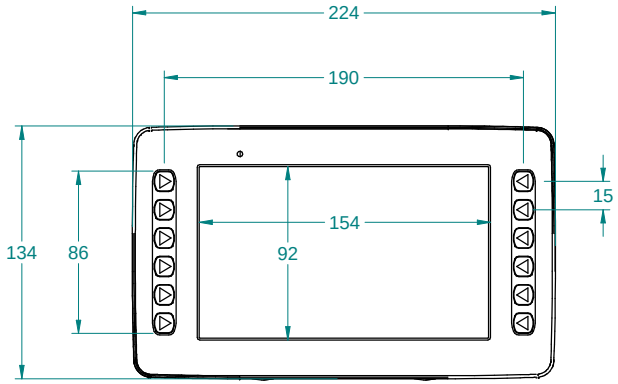


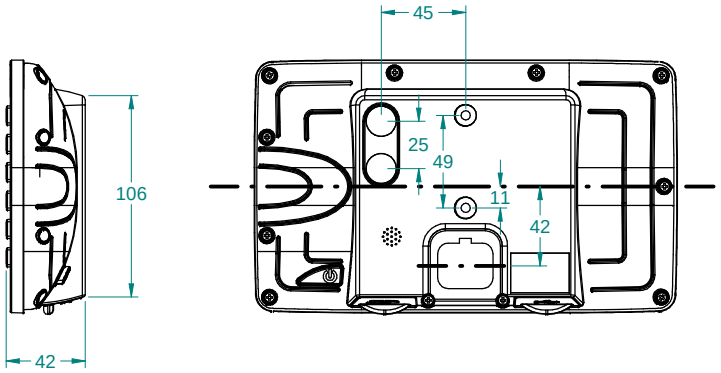


| Materials | |
|---|---|
| External case | ABS |
| Buttons | Natural silicone rubber |
| Cups | SEBS rubber |

| Technical Data | |
|---|---|
| Power Supply | 10 ÷ 32 Vdc |
| Maximum current | 600 mA (12V) |
| Stand-by current | 200 µA |
| IP Grade | IP54 |
| Operating temperature range | -20/+70 °C |
| Storage temperature range | -25/+75 °C |
| Weight | 750 g |
| Connectors | 1 x AMP Superseal 26 ways<br>1 x AMP M12 5 ways<br>1 x AMP M12 4 ways |
| Comunications | 2 x CANBUS 2.0B |
| Inputs | 1 x Enable<br>2 x PAL/NTSC<br>1 x SD Card<br>1 x PNP/NPN (optional)<br>1 x USB Host 2.0 (optional) |
| Outputs | 3 x PNP Protected (optional) |
| Technical Data | Display 7" TFT colors<br>Touchscreen<br>800x480 pixel |

For any Technical Information, please contact our Sales Area

| DATE | REV. N° | OBJECT | MOD. BY |
|---|---|---|---|
| DATE 08/10/2020 | REV. N° 03 | OBJECT Modified technical Data | MOD. BY BA |
| DATE 20/07/2020 | REV. N° 02 | OBJECT Modified current values | MOD. BY BA |
| DATE 29/06/2020 | REV. N° 01 | OBJECT Modified technical Data | MOD. BY BA |

Drawing properties of MC Electronics. All rights reserved.

| DESCRIPTION | | | PAGE |
|---|---|---|---|
| VIRTUAL TERMINAL 7" SLIM | | | 1/1 |
| PART NUMBER | COD. DRAW | DRAWER | DATE |
| VARIOUS CODES | DS001_R3 | BA | 10/03/2020 |
| MEASUREMENT UNIT | VIEW | TOLERANCE mm | SCALE |
| IS | | +/- 0.2 | 1:4 |

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2008
Certified Nr. 50 100 1361