VIRTUAL TERMINAL 3.5" SLIM

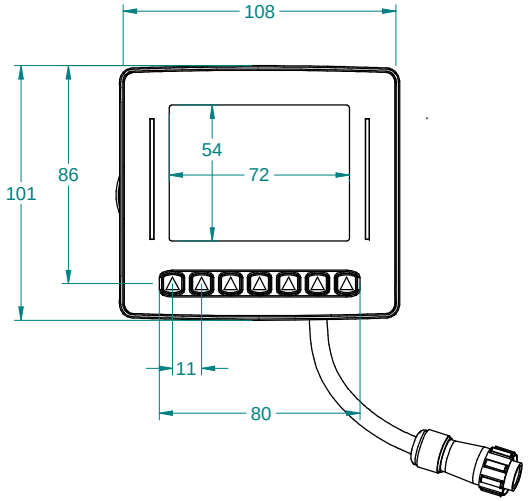

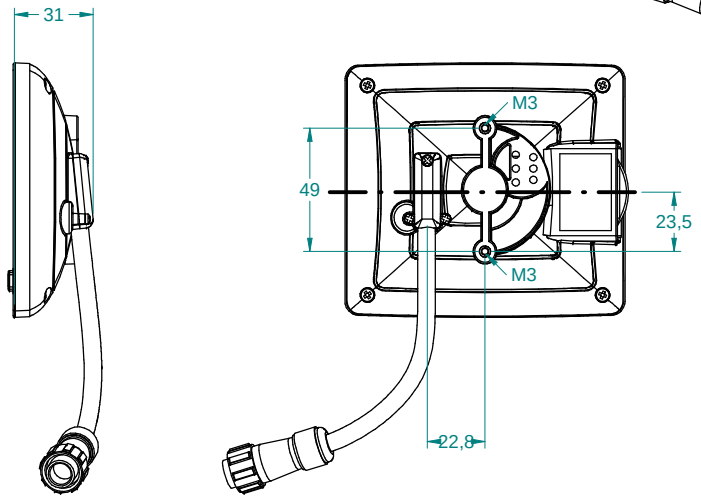

Materials	
External case	ABS
Buttons	Natural silicone rubber
Cups	SEBS rubber

Technical Data	
Power Supply	10 ÷ 30 Vdc
Maximum current	500 mA (12V)
Stand-by current	2,1 mA
IP Grade	IP54
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+75 °C
Weight	200 g
Connectors	1 x Weipu 6 ways
Comunications	1 x CANBUS 2.0B
Inputs	1 x MicroSD Card
Outputs	/
Technical Data	Display 3.5" TFT colors Touchscreen 320x240 pixel

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE 08/10/2020	REV. N° 03	OBJECT Modified Technical Data	MOD. BY BA
DATE 20/07/2020	REV. N° 02	OBJECT Modified current values	MOD. BY BA
DATE 29/06/2020	REV. N° 01	OBJECT Modified Technical Data	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
VIRTUAL TERMINAL 3.5" SLIM			1/1
PART NUMBER	COD. DRAW	DRAWER	DATE
VARIOUS CODES	DS002_R3	BA	20/03/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:3

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2008
Certified Nr. 50 100 1361