CAPACITIVE SENSOR

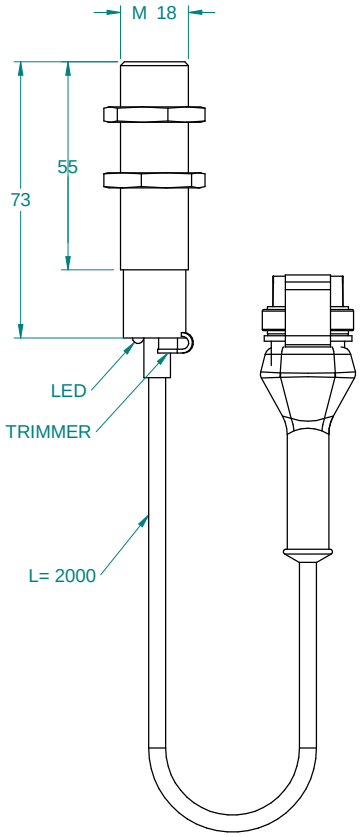

Materials	
Housing Material	Nichel-plated brass

Technical Data	
Power Supply	10 ÷ 30 Vdc
Maximum current	15 mA
Stand-by current	/
IP Grade	IP65
Operating temperature range	-25/+70 °C
Storage temperature range	-25/+70 °C
Weight	140 g
Connectors	1 x Superseal 3 ways
Comunications	1 x open collector
Inputs	/
Outputs	NPN NO (code 1403) NPN NC (code 2025)
Technical Data	Operating distance 1 ÷ 8 mm

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE 27/01/2022	REV. N° 01	OBJECT Added reference code 2025	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
CAPACITIVE SENSOR			1/1
PART NUMBER	COD. DRAW	DRAWER	DATE
VARIOUS CODES	DS018_R1	BA	25/05/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:2

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY
Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361