ECU DC MOTOR-400

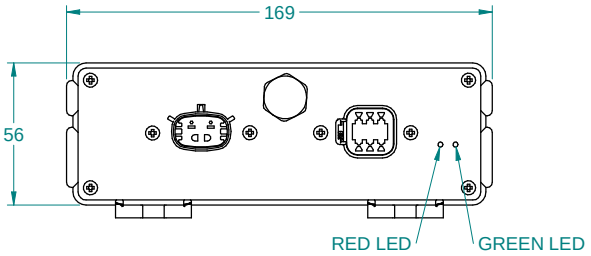

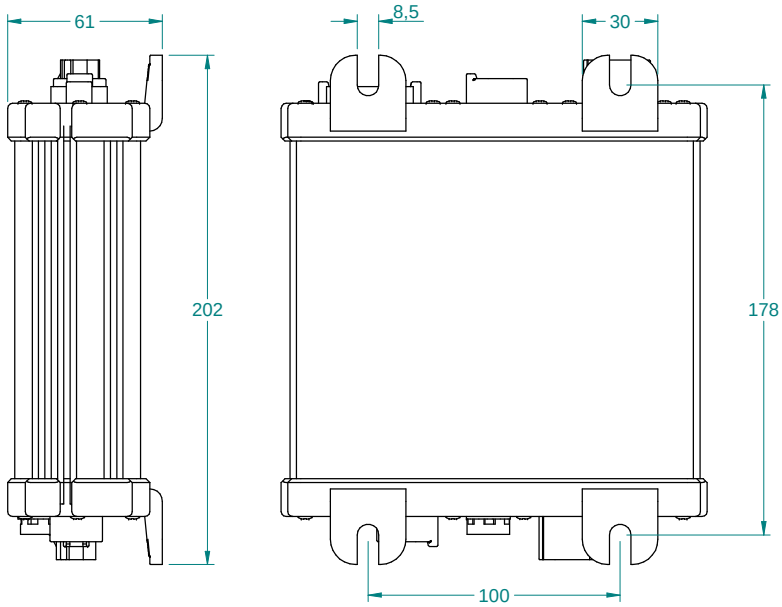

Materials	
External case	Aluminium, ABS

Technical Data	
Power Supply	10 ÷ 16 Vdc
Maximum current	40 A
Stand-by current	200 µA
IP Grade	IP65
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+85 °C
Weight	1,1 kg
Connectors	2 x Molex MX150L 2 ways 1 x Deutsch DT 4 ways 1 x Deutsch DT 6 ways 1 x Deutsch DTM 12 ways
Comunications	1 x CANBUS 2.0B
Inputs	2 x PNP 0-50 kHz 2 x NPN 0-500 Hz 1 x NPN 0-1 kHz, 2 on request
Outputs	1 x PWM 30 kHz 40 A on continuos service 80 A peak value <2 sec
Technical Data	Maximum Output Power 400 W

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
ECU DC MOTOR-400			1/1
PART NUMBER	COD. DRAW	DRAWER	DATE
10CEN-0003	DS031_R0	BA	03/07/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:3

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361