CONTROL PANELS UC 50

12 button and 12 led version

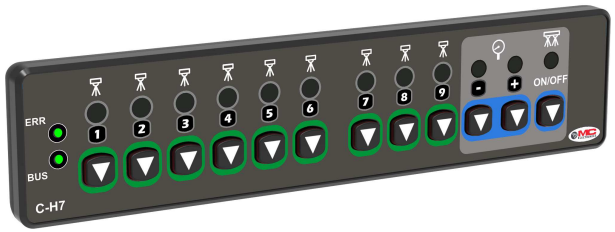

Materials	
External case	ABS
Buttons	Natural silicone rubber

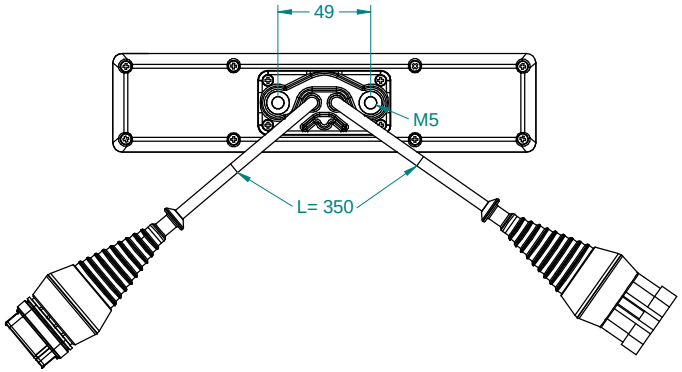

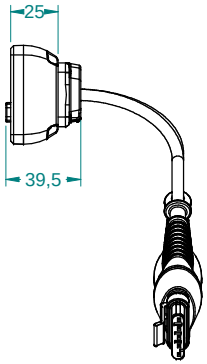

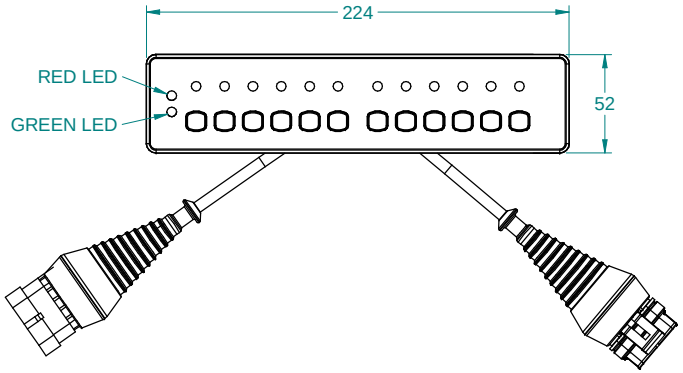

Technical Data	
Power Supply	10 ÷ 16 Vdc
Maximum current	170 mA
Stand-by current	/
IP Grade	IP65
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+85 °C
Weight	250 g
Connectors	2 x Superseal 5 ways
Comunications	1 x CANBUS 2.0B
Inputs	/
Outputs	/
Technical Data	/

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
CONTROL PANELS UC 50			1/2
PART NUMBER	COD. DRAW	DRAWER	DATE
VARIOUS CODES	DS033_R0	BA	08/07/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:4

Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361

CONTROL PANELS UC 50

24 button version

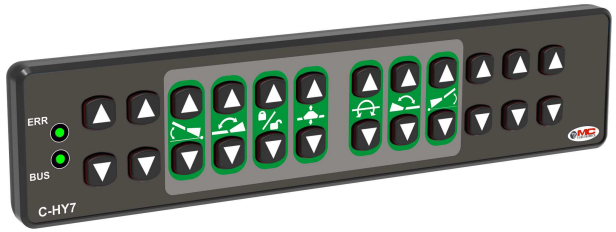

Materials	
External case	ABS
Buttons	Natural silicone rubber

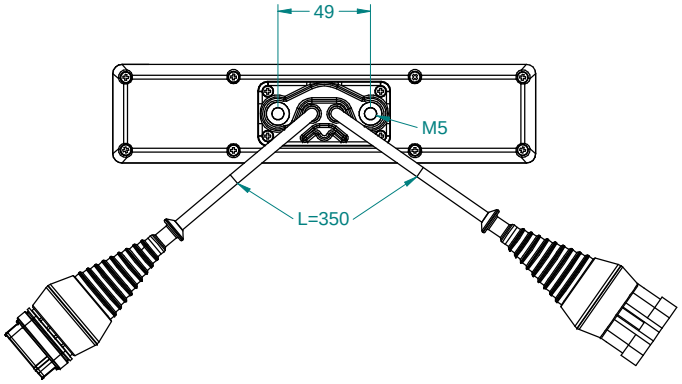

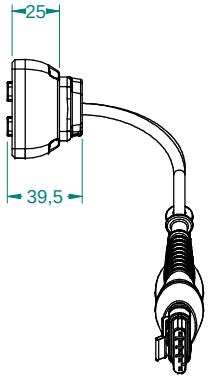

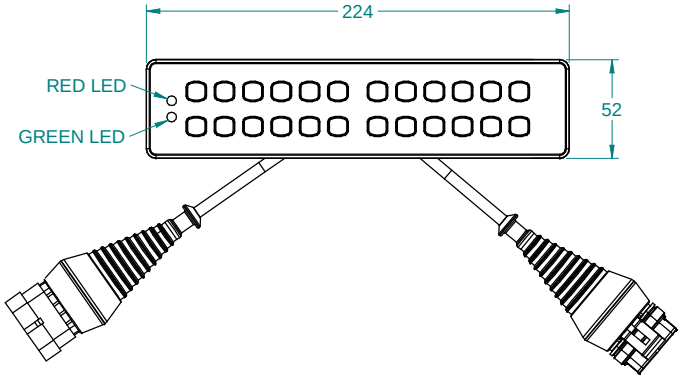

Technical Data	
Power Supply	10 ÷ 16 Vdc
Maximum current	50 mA
Stand-by current	/
IP Grade	IP65
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+85 °C
Weight	250 g
Connectors	2 x Superseal 5 ways
Comunications	1 x CANBUS 2.0B
Inputs	/
Outputs	/
Technical Data	/

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
CONTROL PANELS UC 50			2/2
PART NUMBER	COD. DRAW	DRAWER	DATE
VARIOUS CODES	DS033_R0	BA	08/07/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:4

Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361