# SIEVE SENSOR BAR

| Materials | |
|---|---|
| Sensitive material | Stainless steel |
| Case material | Polyamide |

| Technical Data | |
|---|---|
| Power Supply | 8 ÷ 16 Vdc |
| Maximum current | 50 mA |
| Stand-by current | / |
| IP Grade | IP67 |
| Operating temperature range | -20/+85 °C |
| Storage temperature range | -20/+85 °C |
| Weight | 2500 g |
| Connectors | 1 x SuperSeal 4 ways |
| Comunications | 1 x open collector |
| Inputs | / |
| Outputs | NPN 100 mA |
| Technical Data | - Detection sensor technology: piezo<br>- Sensitivity adjustment input: Square wave 1 kHz 8Vpp duty cycle adjusts sensitivity |

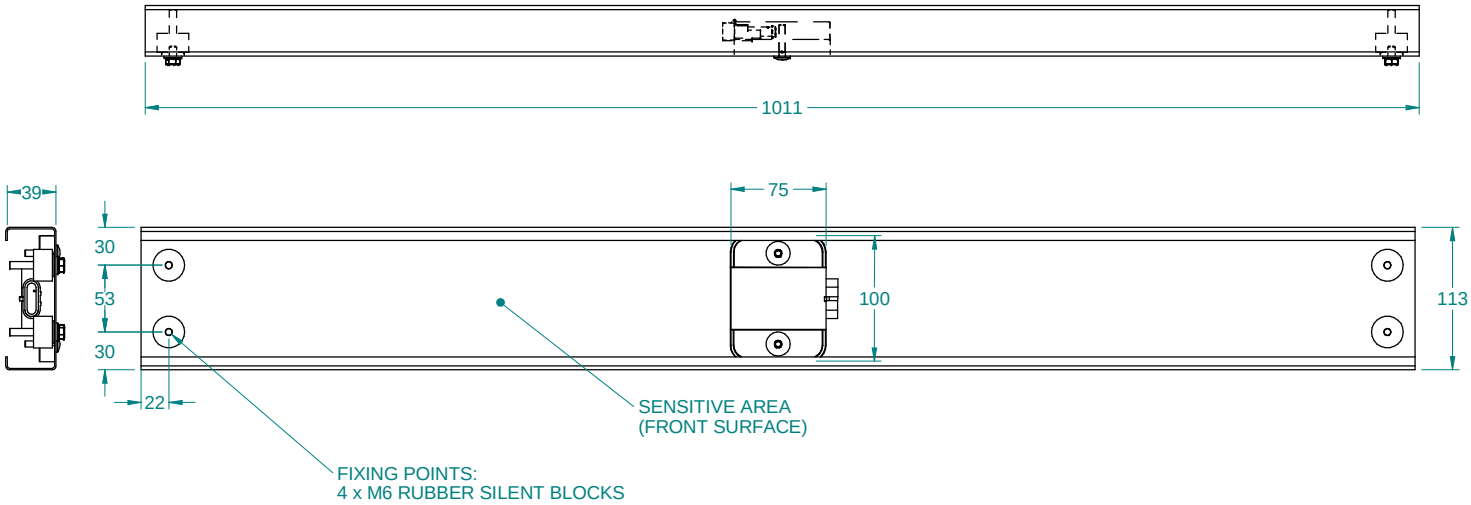


For any Technical Information, please contact our Sales Area

| DATE | REV. N° | OBJECT | MOD. BY |
|---|---|---|---|
| DATE | REV. N° | OBJECT | MOD. BY |
| DATE | REV. N° | OBJECT | MOD. BY |
| DATE | REV. N° | OBJECT | MOD. BY |

Drawing properties of MC Electronics. All rights reserved.

| DESCRIPTION | | | PAGE |
|---|---|---|---|
| SIEVE SENSOR BAR | | | 1/1 |
| PART NUMBER | COD. DRAW | DRAWER | DATE |
| 40SEN-0007 | DS040_R0 | BA | 14/07/2020 |
| MEASUREMENT UNIT | VIEW | TOLERANCE mm | SCALE |
| IS | | +/- 0.2 | 1:6 |

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361