VIRTUAL TERMINAL HYDRA 590

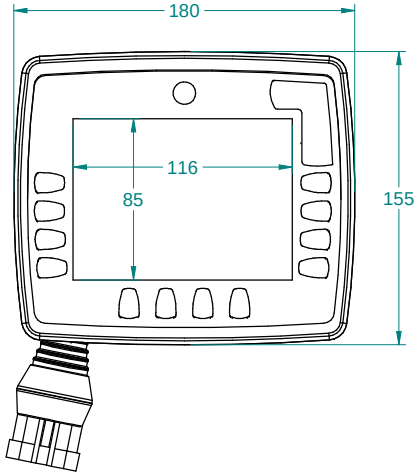

Materials	
External case	ABS
Buttons	PET

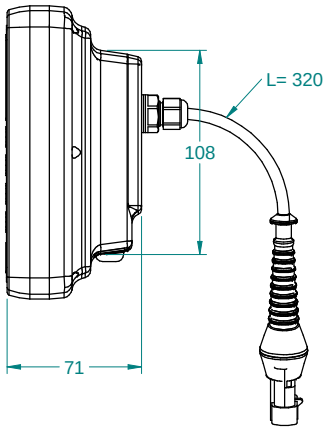

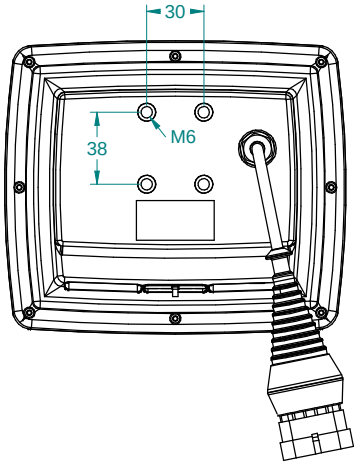

Technical Data	
Power Supply	10 ÷ 16 Vdc
Maximum current	200 mA
Stand-by current	200 µA
IP Grade	IP54
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+75 °C
Weight	850 g
Connectors	1 x AMP Superseal 5 ways
Comunications	1 x CANBUS 2.0B 1 x RS 232
Inputs	1 x SD Card
Outputs	/
Technical Data	Display 5.7" monochromatic 320x240 pixel

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE 08/10/2020	REV. N° 01	OBJECT Modified Technical Data	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
VIRTUAL TERMINAL HYDRA 590			1/1
PART NUMBER	COD. DRAW	DRAWER	DATE
20VT-HYDRA590-BN	DS043_R1	BA	23/07/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:4

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2008
Certified Nr. 50 100 1361