MAXISEEDER PHOTOCELL

Tube internal electronics (TIN) Version

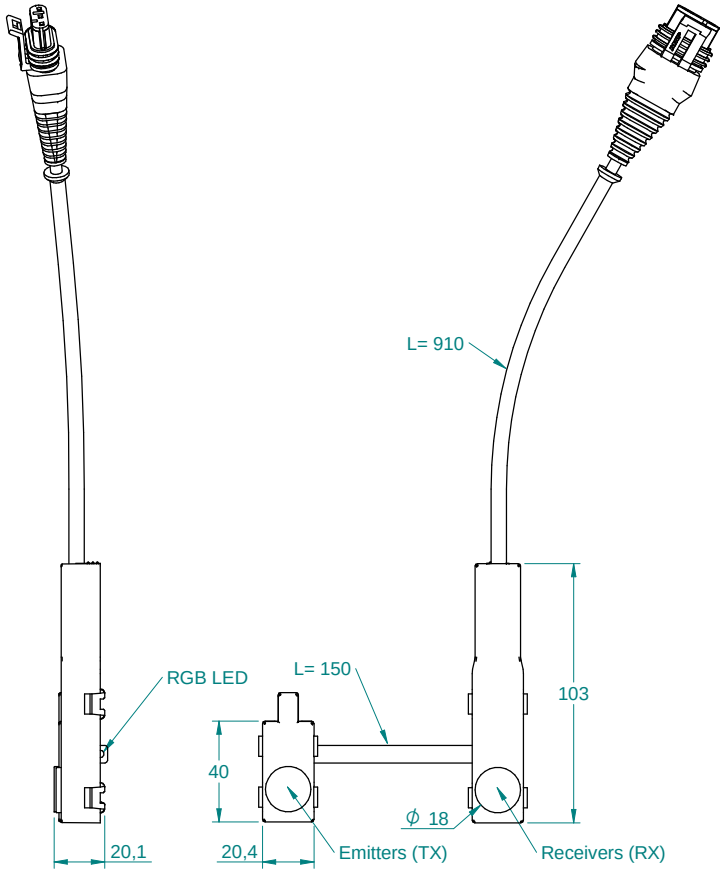

Technical Data	
Power Supply	6 ÷ 16 Vdc
Maximum current	80 mA
Stand-by current	/
IP Grade	IP68
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+80 °C
Weight	120 g
Connectors	1 x Superseal 3 ways
Comunications	1 x open collector
Inputs	/
Outputs	NPN
Technical Data	Minimum seed dimension 4 mm Maximum seed frequency 250Hz 3 Emitters (TX) & 3 Receivers (RX)

Materials	
Led case	Polymethylmethacrylate
Insulating material	Polyurethane resin
Seeding tube	Nylon

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE 10/02/2021	REV. N° 01	OBJECT Added tube dimensions	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
MAXISEEDER PHOTOCELL			1/2
PART NUMBER	COD. DRAW	DRAWER	DATE
10FOT-0081	DS044_R1	BA	29/10/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:3

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361

MAXISEEDER PHOTOCELL

Tube dimensions

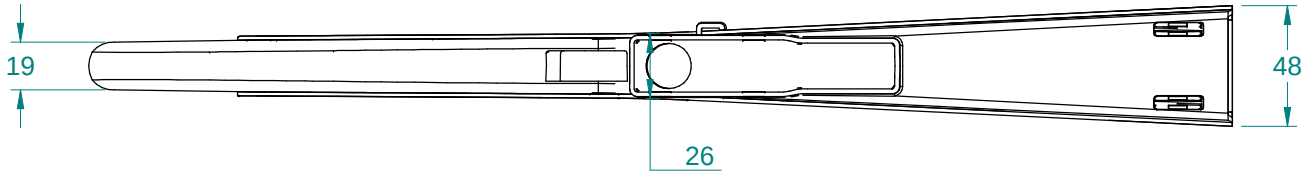



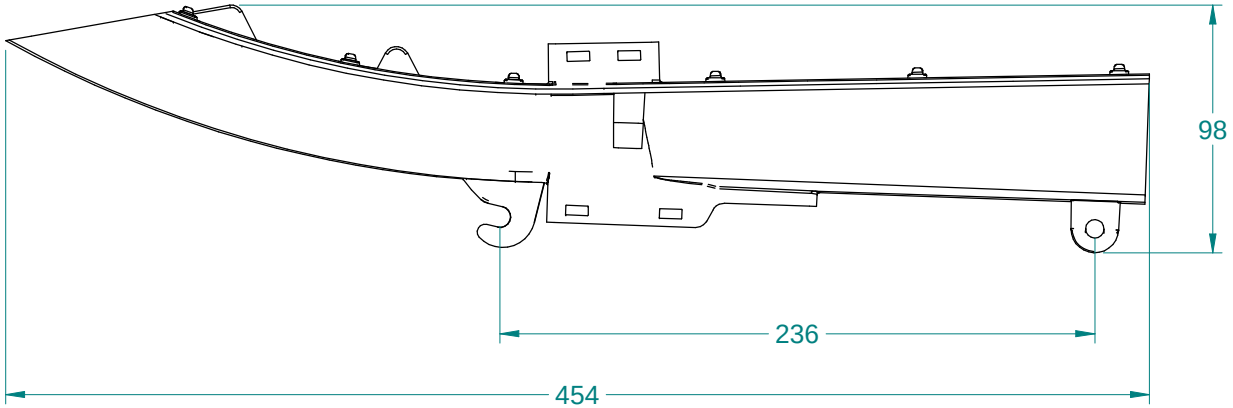

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE 10/02/2021	REV. N° 01	OBJECT Added tube dimensions	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
MAXISEEDER PHOTOCELL			2/2
PART NUMBER	COD. DRAW	DRAWER	DATE
10FOT-0081	DS044_R1	BA	29/10/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:1

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY

Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361