EASYSEEDER PHOTOCELL

Bracket Version

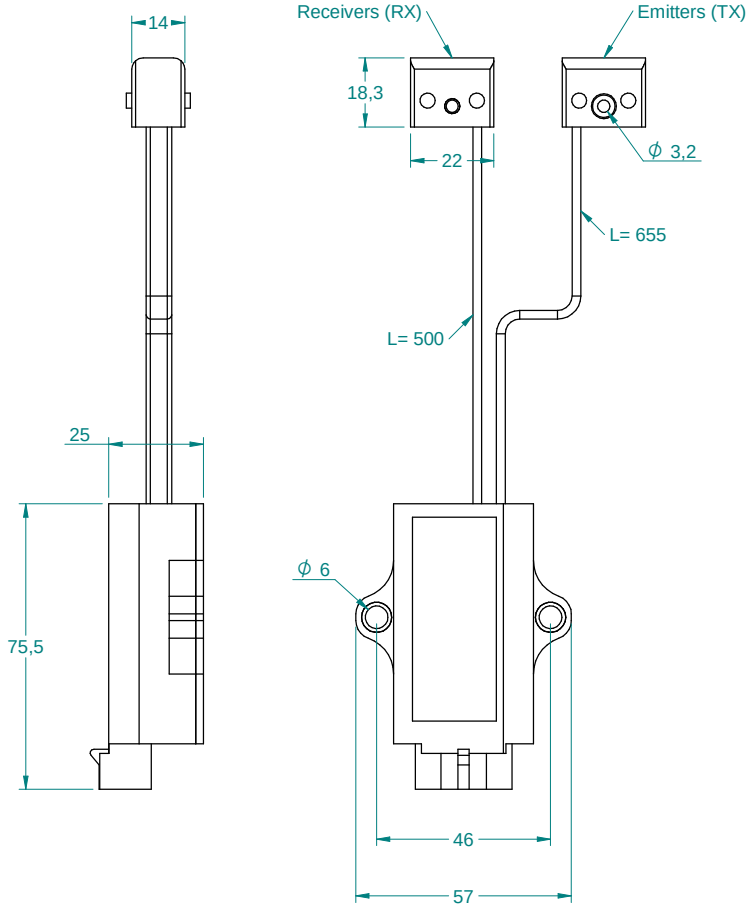

Materials	
Led case	Polymethylmethacrylate
Electronics case	Polyamide
Insulating material	Polyurethane resin

Technical Data	
Power Supply	6 ÷ 16 Vdc
Maximum current	50 mA
Stand-by current	/
IP Grade	IP68
Operating temperature range	-20/+70 °C
Storage temperature range	-25/+80 °C
Weight	120 g
Connectors	1 x Superseal 3 ways
Comunications	1 x open collector
Inputs	/
Outputs	NPN
Technical Data	Minimum seed dimension 3,5mm Maximum seed frequency 250Hz 3 Emitters (TX) & 3 Receivers (RX)

For any Technical Information, please contact our Sales Area

DATE	REV. N°	OBJECT	MOD. BY
DATE	REV. N°	OBJECT	MOD. BY
DATE 15/06/2021	REV. N° 02	OBJECT Modified part number	MOD. BY BA
DATE 19/04/2021	REV. N° 01	OBJECT Modified output connection of the photocell	MOD. BY BA

Drawing properties of MC Electronics. All rights reserved.

DESCRIPTION			PAGE
EASYSEEDER PHOTOCELL			1/1
PART NUMBER	COD. DRAW	DRAWER	DATE
SEM-0063	DS045_R2	BA	09/11/2020
MEASUREMENT UNIT	VIEW	TOLERANCE mm	SCALE
IS		+/- 0.2	1:2

MC ELECTRONICS
Fiesso Umbertiano - Rovigo - ITALY
Certified Quality System
UNI EN ISO 9001:2015
Certified Nr. 50 100 1361